


Newsletter_{13/2016}

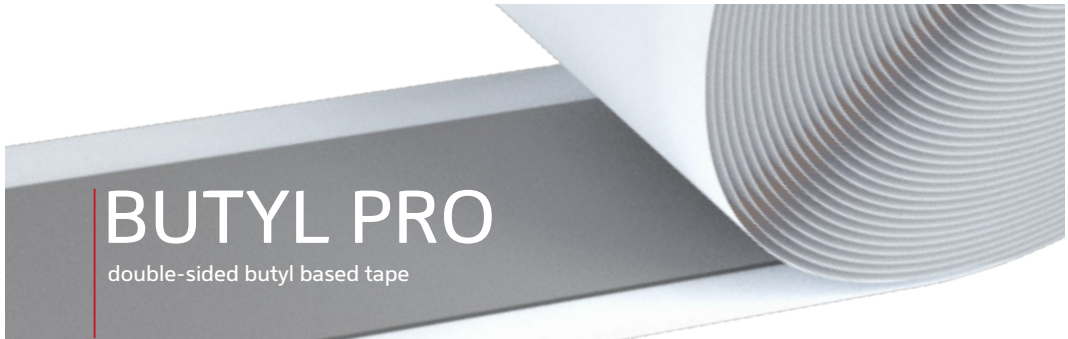


BUTYL PRO

double-sided butyl based tape

Eurovent BUTYL PRO is used primarily as sealing tape under the battens ensuring sealed surface under battens application on the roofing membrane. In places where the nails and staples pierce the roofing membrane ensures its tightness. In addition, used for bonding and sealing vapor barrier and roofing foils, perfectly combines them with plastic, concrete, wood, brick or metal parts. It works perfectly well in skeletal construction for bonding and sealing wind-insulating membranes.

Solvent-free tape **Eurovent BUTYL PRO** is based on butyl adhesive and an environmentally-friendly product. Adhesive surface is additionally protected with plastic foil.

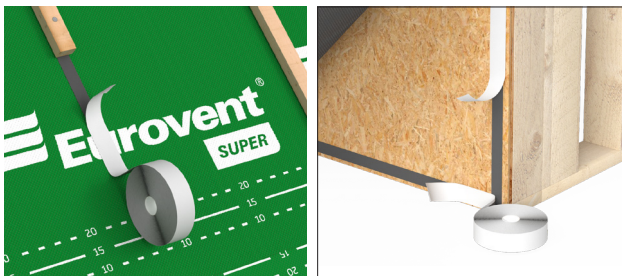

Material	PE film, butyl adhesive
Roll width	45 mm
Roll length	20 m
UV resistance	2 months
Application temperature	above 5°C
Packaging	8 rolek w pudełku 240 rolek na palecie

Advantages:

- excellent adhesive strength
- very good resistance against aging
- butyl protected with PE film
- wide bonding surface