
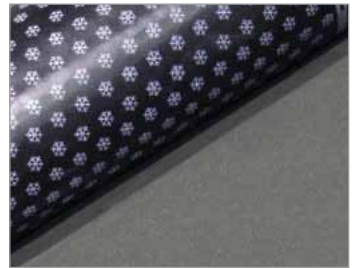


Designed for installation as the bottom layer in two layer roofing system on buildings and constructions, for waterproofing of engineering structures and for vapour barrier. Can be used on new construction or repair. Not recommended to use as single ply waterproofing. Do not use on the base of mineral wool.



Torch-on application to the prepared surface. When used as vapour barrier can be loose laid and torched in overlaps.

TECHNICAL DATA

PRODUCT	FLOW RESISTANCE, °C	MAXIMUM TENSILE FORCE L/T, N/50 mm	RESISTANCE TO TEARING, N	ELONGATION, %	REINFORCEMENT TYPE / WEIGHT
PRIMA PLAST GV 4.0	≥130	400±150 300±150	50±10 50±10	6.0±4.0 6.0±4.0	glass-fiber, 55 g/m ²
PRIMA PLAST NEW V 3.0	≥120	400±150 300±150	50±10 50±10	5.0±2.0 5.0±2.0	glass-fiber, 55 g/m ²

LOGISTIC DATA

PRODUCT	WEIGHT, kg/m ²	THICKNESS, mm	LENGTH, m	WIDTH, m	ROLLS PER PALLET
PRIMA PLAST GV 4.0	4.0±0.20	-	10	1	23
PRIMA PLAST NEW V 3.0	3.0±0.15	-	10	1	25